

Delivering Tailored Solutions

Specifications of Our 3 Industry-Leading Mullers

Simpson Mix-Muller®

Medium-speed, high-intensity, muller for batch operation.




Simpson Speedmuller®

High-speed, high-intensity muller for batch operation.



Simpson Multi-Mull®

Medium-speed, high-intensity, muller for continuous operation.

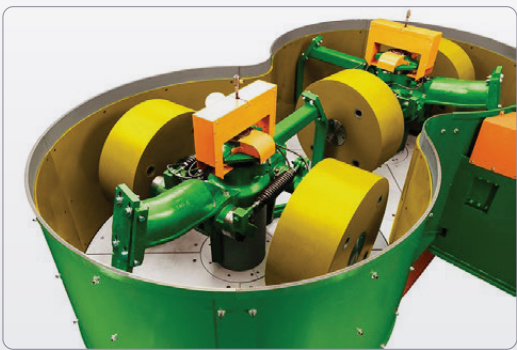

Simpson Mix-Muller Technical Data - G Series

Model		LF	05	1F	1 1/2G	2G	2 1/2G	3G	6G
Batch Capacity	tph	44	300	525	1,200	2,500	3,600	5,000	8,400
OUTPUT	at 120s cycle	tph		7	18	37	54	75	126
	at 180s cycle	tph		5	12	25	36	50	84
Crib Diameter	in	24	40	50	65	80	90	100	120
Crib Height	in	9	12	18	30	40	40	44	42
Height	in	40	55	90	120	140	170	180	205
Width	in	30	40	60	70	85	95	105	150
Length	in	40	50	60	85	105	115	125	160
Drive Motor	HP	1	3	10	20	50	75	125	200
Exhaust	ft³/min			660	1,080	2,000	2,700	4,000	6,000
Shipping Weight	lbs	750	1,400	3,150	8,100	13,000	21,300	26,550	42,000

Simpson Speedmuller Technical Data - B Series

Model		LAB	45B	55B	75B	85B	100B	100B-250	150B
Batch Capacity	lbs	20-40	750	1,200	1,800	3,500	5,000	6,000	8,150
OUTPUT	at 90s cycle	tph	15	24	36	70	100	120	163
	at 120s cycle	tph	11	18	27	53	75	90	122
Muller Wheels		1	2	2	2	2	3	3	3
Cooling Blower	cfm		2,900	3,800	4,500	6,000	8,000	8,000	8,000
	hp		5	10	15	10	20	20	20
Width	in	28	68	84	98	115	140	140	154
Length	in	40	68	99	108	136	154	154	195
Height	in	44	99	114	125	139	145	157	195
Drive Motor	hp	3	30	60	100	125	200	250	400
Shipping Weight	lbs	750	1,400	3,150	8,100	13,000	21,300	26,550	42,000

Simpson Multi-Mull Technical Data - G Series

Model		215G	22G	225G	23G-200	23G-250	26G-300	26G-400	26G-500
Retained Capacity	lbs	2,500	4,900	7,080	9,700	12,180	16,500	19,500	22,500
OUTPUT	at 90s Retention Time	tph	50	98	142	194	244	330	450
	at 120s Retention Time	tph	37	73	106	145	183	247	337
	at 150s Retention Time	tph	30	59	85	116	146	198	270
Crib Diameter	in	65	80	90	100	100	120	120	120
Crib Height	in	30	40	40	45	45	40	55	55
Height	in	100	105	125	130	130	140	160	160
Width	in	80	95	115	125	125	145	145	145
Length	in	125	155	175	195	195	245	245	245
Drive Motor	hp	50	100	150	200	250	300	400	500
Exhaust	ft³/min	2,100	3,800	5,100	7,600	7,600	11,000	11,000	11,000
Shipping Weight	lbs	17,000	24,800	38,000	56,000	60,000	80,000	83,000	100,000

All figures are approximate and are subject to change depending upon your application.