


Delivering Tailored Solutions


Muller Specifications



Simpson Mix-Muller®
Medium-speed, high-intensity,
muller for batch operation.

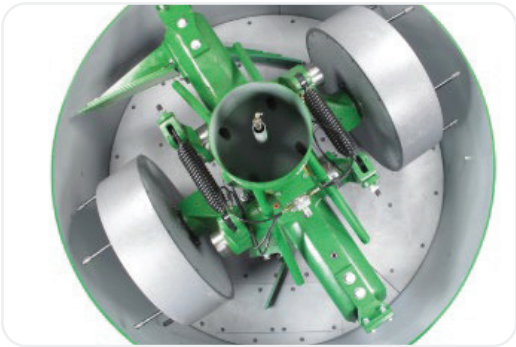

Simpson Speedmullor®
High-speed, high-intensity muller
for batch operation..

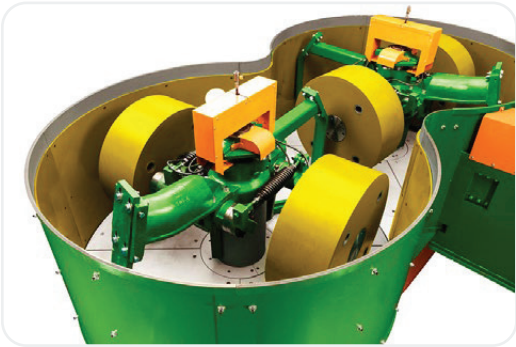

Simpson Multi-Mull®
Medium-speed, high-intensity,
muller for continuous operation.

[simpsongroup.com](https://www.simpsongroup.com)
sales@simpsongroup.com | +1-630-978-0044

Simpson Mix-Muller Technical Data - G Series

Model		LF	05	1F	1 1/2G	2G	2 1/2G	3G	6G
Batch Capacity	kgs	20	135	240	560	1,130	1,630	2,260	3,810
OUTPUT	at 120s cycle	tph		7	17	34	49	67	114
	at 180s cycle	tph		5	11	23	33	45	76
Crib Diameter	mm	610	990	1,270	1,625	2,030	2,300	2,560	3,050
Crib Height	mm	230	305	460	835	980	980	1,110	1,070
Height	mm	1,000	1,350	1,670	2,960	3,560	4,260	4,600	5,200
Width	mm	795	1,020	1,430	1,720	2,130	2,400	2,650	3,820
Length	mm	975	1,190	1,560	2,120	2,715	2,915	3,150	3,550
Drive Motor	HP	1	3	10	20	50	75	125	200
	kw	0.7	2.2	7.5	15	37	56	93	150
Exhaust	m³/hr			1,120	1,840	3,400	4,590	6,800	10,200
Shipping Weight	kgs	340	635	1,430	3,675	5,900	9,670	12,040	19,050

Simpson Speedmullor Technical Data - B Series

Model		LAB	45B	55B	75B	85B	100B	100B-250	150B
Batch Capacity	kgs	15	340	540	810	1,580	2,260	2,720	3,700
OUTPUT	at 90s Retention Time	tph	14	22	33	64	91	109	148
	at 120s Retention Time	tph	10	16	24	48	68	82	110
Muller Wheels		1	2	2	2	2	3	3	3
Cooling Blower	m³/hr		4,390	6,460	7,650	10,200	13,600	13,600	13,600
	kw		3.7	7.5	11	7.5	15	15	15
Width	mm	711	1,700	2,130	2,480	2,920	3,550	3,550	3,910
Length	mm	1,016	1,700	2,510	2,740	3,450	3,910	3,910	4,350
Height	mm	1,105	2,500	2,890	3,160	3,510	3,680	3,980	4,950
Drive Motor	hp	3	30	60	100	125	200	250	400
	kw	2.2	22	45	75	93	150	186	300
Shipping Weight	kgs	280	3,270	4,540	8,170	11,570	13,700	13,800	30,000

Simpson Multi-Mull Technical Data - G Series

Model		215G	22G	225G	23G-200	23G-250	26G-350	26G-400	26G-500
Retained Capacity	lbs	1,130	2,220	3,210	4,390	5,520	7,480	8,840	10,200
OUTPUT	at 90s Retention Time	tph	45	90	128	175	220	300	400
	at 120s Retention Time	tph	34	67	96	132	166	225	306
	at 150s Retention Time	tph	27	53	77	105	132	180	245
Crib Diameter	in	1,625	2,030	2,300	2,560	2,560	3,050	3,050	3,050
Crib Height	in	830	980	980	1,100	1,100	1,070	1,400	1,400
Height	in	2,495	2,680	3,125	3,275	3,275	3,425	4,015	4,015
Width	in	2,615	3,495	3,580	4,485	4,485	5,025	5,285	5,285
Length	in	3,195	3,650	4,455	4,940	4,940	5,830	5,830	5,830
Drive Motor	HP	50	100	150	200	250	300	400	500
		37	75	112	150	186	225	300	375
Exhaust	ft³/min	3,570	6,460	8,670	12,920	12,920	18,700	18,700	18,700
Shipping Weight	lbs	7,710	11,240	17,230	25,400	27,210	36,280	37,640	45,360

All figures are approximate and are subject to change depending upon your application.