

Simpson Multi-Cooler®

As foundry sand preparation and molding plants become increasingly high-speed and quality-oriented, the control of return sand temperature is essential. The Simpson Multi-Cooler is specifically designed to provide the mixer group with sand that is cooled to temperatures that allow optimal mulling, pre-mixed to eliminate return sand variations and with a moisture content controlled within tight tolerances. The result is optimal mulling and high-quality, profitable castings.

Description

Continuous sand cooler and pre-conditioning system operating on the principle of evaporative cooling.

Application

Sand systems with return sand temperature above 120° F and/or wide variations in return sand properties.

Features


- Pre-mixing with back-blending and controlled retention
- High-efficiency cooling to below 120° F or 20° F over ambient
- Discharge moisture of 2.0% +/-0.2%

Upgrades

- Discharge Door and Controls Upgrade
- Moisture Controls Upgrade

Cooling Pre-Mixing

Continuous back-blending of a large volume of retained sand from multiple molds eliminates any “first-in/first-out” effect and assures complete homogeneity of return sand prior to final mixing.

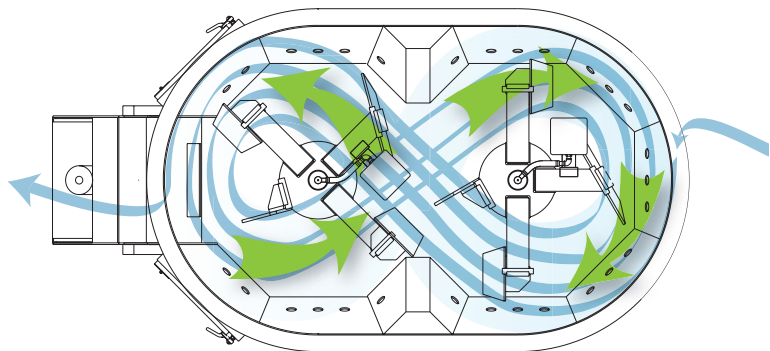

Simpson Multi-Cooler Technical Data								
Model		MC-25	MC-50	MC-100	MC-150	MC-200	MC-250	MC-300
Capacity	tph	22	45	90	135	180	225	270
Length	mm	2,400	3,680	4,360	5,300	6,140	7,440	7,440
Width	mm	1,560	2,080	2,480	2,970	3,470	4,720	4,720
Height	mm	2,700	3,370	3,420	4,060	4,390	6,070	6,070
Drive Motor	hp	15	30	50	100	150	200	250
	kw	11	22	37	75	112	150	186
Blower Motor	hp	15	20	40	60	75	100	100
	kw	11	15	30	45	56	75	75
Inlet Blower	m³/hr	4,500	9,000	18,000	26,850	35,860	44,860	53,870
Exhaust	m³/hr	6,000	11,220	22,260	33,480	44,520	55,740	66,950
Shipping Weight	kgs	2,700	4,945	7,415	12,020	19,600	29,250	29,250

All figures are approximate and are subject to change depending upon your application.

Pre-Conditioning

The mixer group can operate at optimal performance and efficiency when shakeout sand is continuously cooled, pre-mixed and the moisture is increased and stabilized within a narrow tolerance before final mixing.

