


Delivering Tailored Solutions

Muller Specifications



Simpson Mix-Muller®
Medium-speed, high-intensity,
muller for batch operation.

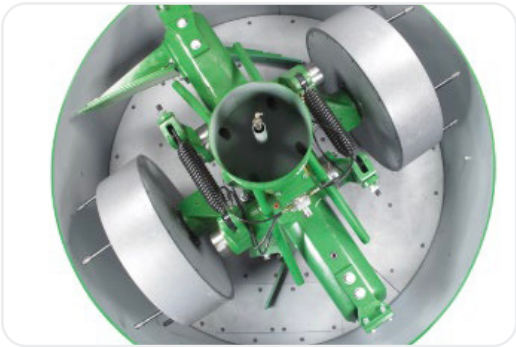

Simpson Speedmuller®
High-speed, high-intensity muller
for batch operation..



Simpson Multi-Mull®
Medium-speed, high-intensity,
muller for continuous operation.

Simpson Mix-Muller Technical Data - G Series

Model		LF	05	1F	1 1/2G	2G	2 1/2G	3G	6G
Batch Capacity	lbs	44	300	525	1,200	2,500	3,600	5,000	8,400
OUTPUT	at 120s cycle	tph		7	18	37	54	75	126
	at 180s cycle	tph		5	12	25	36	50	84
Crib Diameter	in	24	39.25	50	64	80	90	100	120
Crib Height	in	9	12	18	33	39	38	44	42
Height	in	43	54	88	120	140	170	180	207
Width	in	31	41	60	70	85	95	105	125
Length	in	40	47	60	85	105	115	120	160
Drive Motor	HP	1	3	10	25	50	75	125	200
Exhaust	ft³/min			660	1,080	2,000	2,700	4,000	6,000
Shipping Weight	lbs	1,280	1,400	4,100	8,100	13,000	21,000	26,550	42,000

Simpson Speedmuller Technical Data - B Series

Model		75B	85B	100B	100B-250	150B
Batch Capacity	lbs	1,800	3,500	5,000	6,000	7,500
OUTPUT	at 90s cycle	tph	36	70	100	150
	at 120s cycle	tph	27	53	75	113
Muller Wheels		2	2	3	3	3
Cooling Blower	cfm	4,500	6,000	8,000	8,000	8,000
	hp	10	10	20	20	20
Width	in	98	114	140	140	154
Length	in	114	139	159	159	172
Height	in	134	141	148	160	205
Drive Motor	hp	100	125	200	250	400
Shipping Weight	lbs	15,800	27,500	29,000	34,500	74,500

Simpson Multi-Mull Technical Data - G Series

Model		215G	22G	225G	23G-200	23G-250	26G-350	26G-400	26G-500
Retained Capacity	lbs	2,500	4,900	7,080	9,700	12,180	16,500	19,500	22,500
OUTPUT	at 90s Retention Time	tph	50	98	142	244	330	390	450
	at 120s Retention Time	tph	37	73	106	183	247	292	337
	at 150s Retention Time	tph	30	59	85	146	198	234	270
Crib Diameter	in	64	80	90	100	100	120	120	120
Crib Height	in	33	39	38	44	44	42	56	56
Height	in	100	105	125	130	130	140	160	160
Width	in	80	100	115	130	130	151	151	151
Length	in	125	155	175	195	195	232	232	232
Drive Motor	HP	50	100	150	200	250	300	400	500
Exhaust	ft³/min	2,100	3,800	5,100	7,600	7,600	11,000	11,000	11,000
Shipping Weight	lbs	15,000	25,000	38,200	56,000	60,000	80,000	83,000	100,000

All figures are approximate and are subject to change depending upon your application.

[simpsongroup.com](https://www.simpsongroup.com)

sales@simpsongroup.com | +1-630-978-0044